

ALV



DESCRIPTION

Alimentatori IP68

FEATURES

Alimentatori rivestiti con resina epossidica che porta ad una protezione IP68


Made in Italy

- Tensione costante
- Durata > 50.000h
- Per uso interno ed esterno
- Assenza di sfarfallio
- Rivestimento in resina epossidica (brevetto depositato)
- Protezione Surge (linea-neutro) fino a 2kV
- Basso ripple in uscita, PFC integrato
- Fattore di potenza >0.95. Consumo a vuoto 0.3 typ.



TECHNICAL DATA

Certifications	CE , RoHS , SELV
Regulations	EN55015 , EN61000-3-2 , EN61000-3-3 , EN61547 , EN61347-1 , EN61347-2-12 , EN61347-2-13
Protection class	Classe II
Material	Resina epossidica
Packaging	Box
Attachment	Cavo
Connection	Collegamento in parallelo
Warranty	5 years
IP grade	IP68

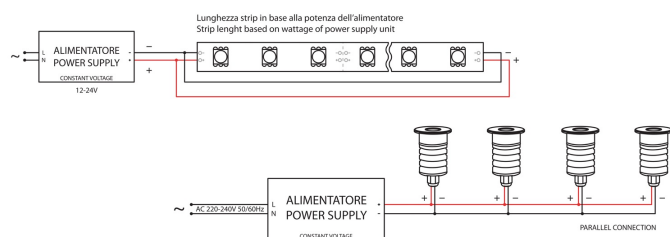

MODELLI

Codice	Descrizione
ALV035.24	Alim. in tensione IP68 24Vdc, 35W
ALV062.24	Alim. in tensione IP68 24Vdc, 62W

ALV100.24

Alim. in tensione IP68 24Vdc, 100W

SPECIFIC TECHNICAL DATA BY CODE

	ALV035.24	ALV062.24	ALV100.24
Current	1,46A	2,6A	4,15A
Output voltage	24,0Vdc	24,0Vdc	24,0Vdc
Input voltage	220,0-240,0Vac	220,0-240,0Vac	220,0-240,0Vac
Watt	35,0W	62,0W	100,0W
Inner BOX	1	1	1
Size	220 x 33	220 x 33	312 x 33
Weight kg	0.43	0.45	0.68