

CPB075W



DESCRIPTION

CentralineRGBW in tensione IP20, 75W, 230Vac Dimmer, RF, push 1/10


FEATURES

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX


TECHNICAL DATA

Certifications	CE , RoHS , EMC , LVD , RED
Regulations	EN301 489 , EN 62479 , EN 60950 , EN300 328
Packaging	Box
Warranty	5 years
IP grade	IP20


• Per luci RGB

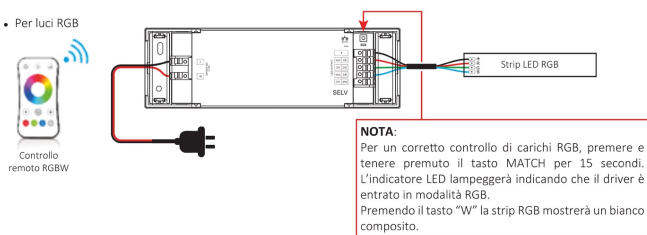

• Per luci RGBW

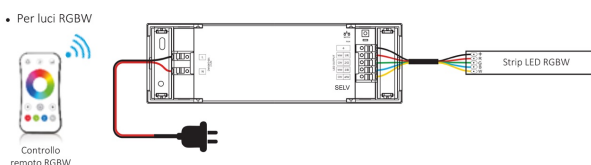

• Per binaco dinamico

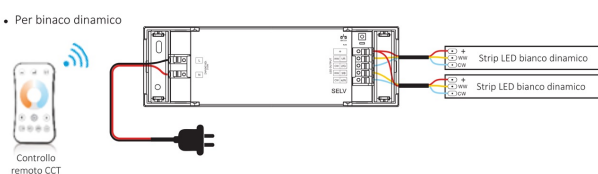

• Per luci a singolo colore



MODELLI

Codice	Descrizione
CPB075.24P4	Centralina RGBW in tensione IP20, 24Vdc, 75W, 230Vac Dimmer, RF, push 1/
CTC-R8	Telecomando RF 2,4 Ghz RGBW 4 zone 1 scena CR2032
CTC-RT10	Telecomando PRO RF 2,4Ghz RGBW+CCT+DIM 4 zone 2 scene 2xAAA
CTC-T12	Radiocomando bicolore touch da parete 503 4 zone master DMX e RF 2,4Ghz
CTC-T14	Radiocomando RGBW touch da parete 503 4 zone master DMX e RF 2,4Ghz
CTC-T24	Radiocomando RGBW touch da parete a batteria 4 zone uscita RF 2,4Ghz
CTC-T25-1	Radiocomando RGBW+BIC touch da parete a batteria 4 zone uscita RF 2,4Ghz

SPECIFIC TECHNICAL DATA BY CODE

	CPB075.24P4	CTC-R8	CTC-RT10	CTC-T12	CTC-T14	CTC-T24	CTC-T25-1
Input voltage		Batteria CR2032	2 batterie AAA	100,0-240,0Vac	100,0-240,0Vac	2 batterie AAA	2 batterie AAA
Master BOX		1	1	30	30	1	1
Inner BOX	1	1	1	1	1	1	1